


# M1000 Konfigurations-skema - Version 1.13

● = LED tændt  
 ○ = LED slukket  
 \* = Variabel/blinkende LED  
 Hold Masterbrik i 2 sekunder for at gå videre/gemme  
 Tilbage: inaktiv i 10 sekunder  
 Afslut: Timeout eller Power off

●○○ (Standard)  
 For at komme ind i servicekonfiguration, vis Masterbrik/kort indenfor 10 sekunder efter Power On

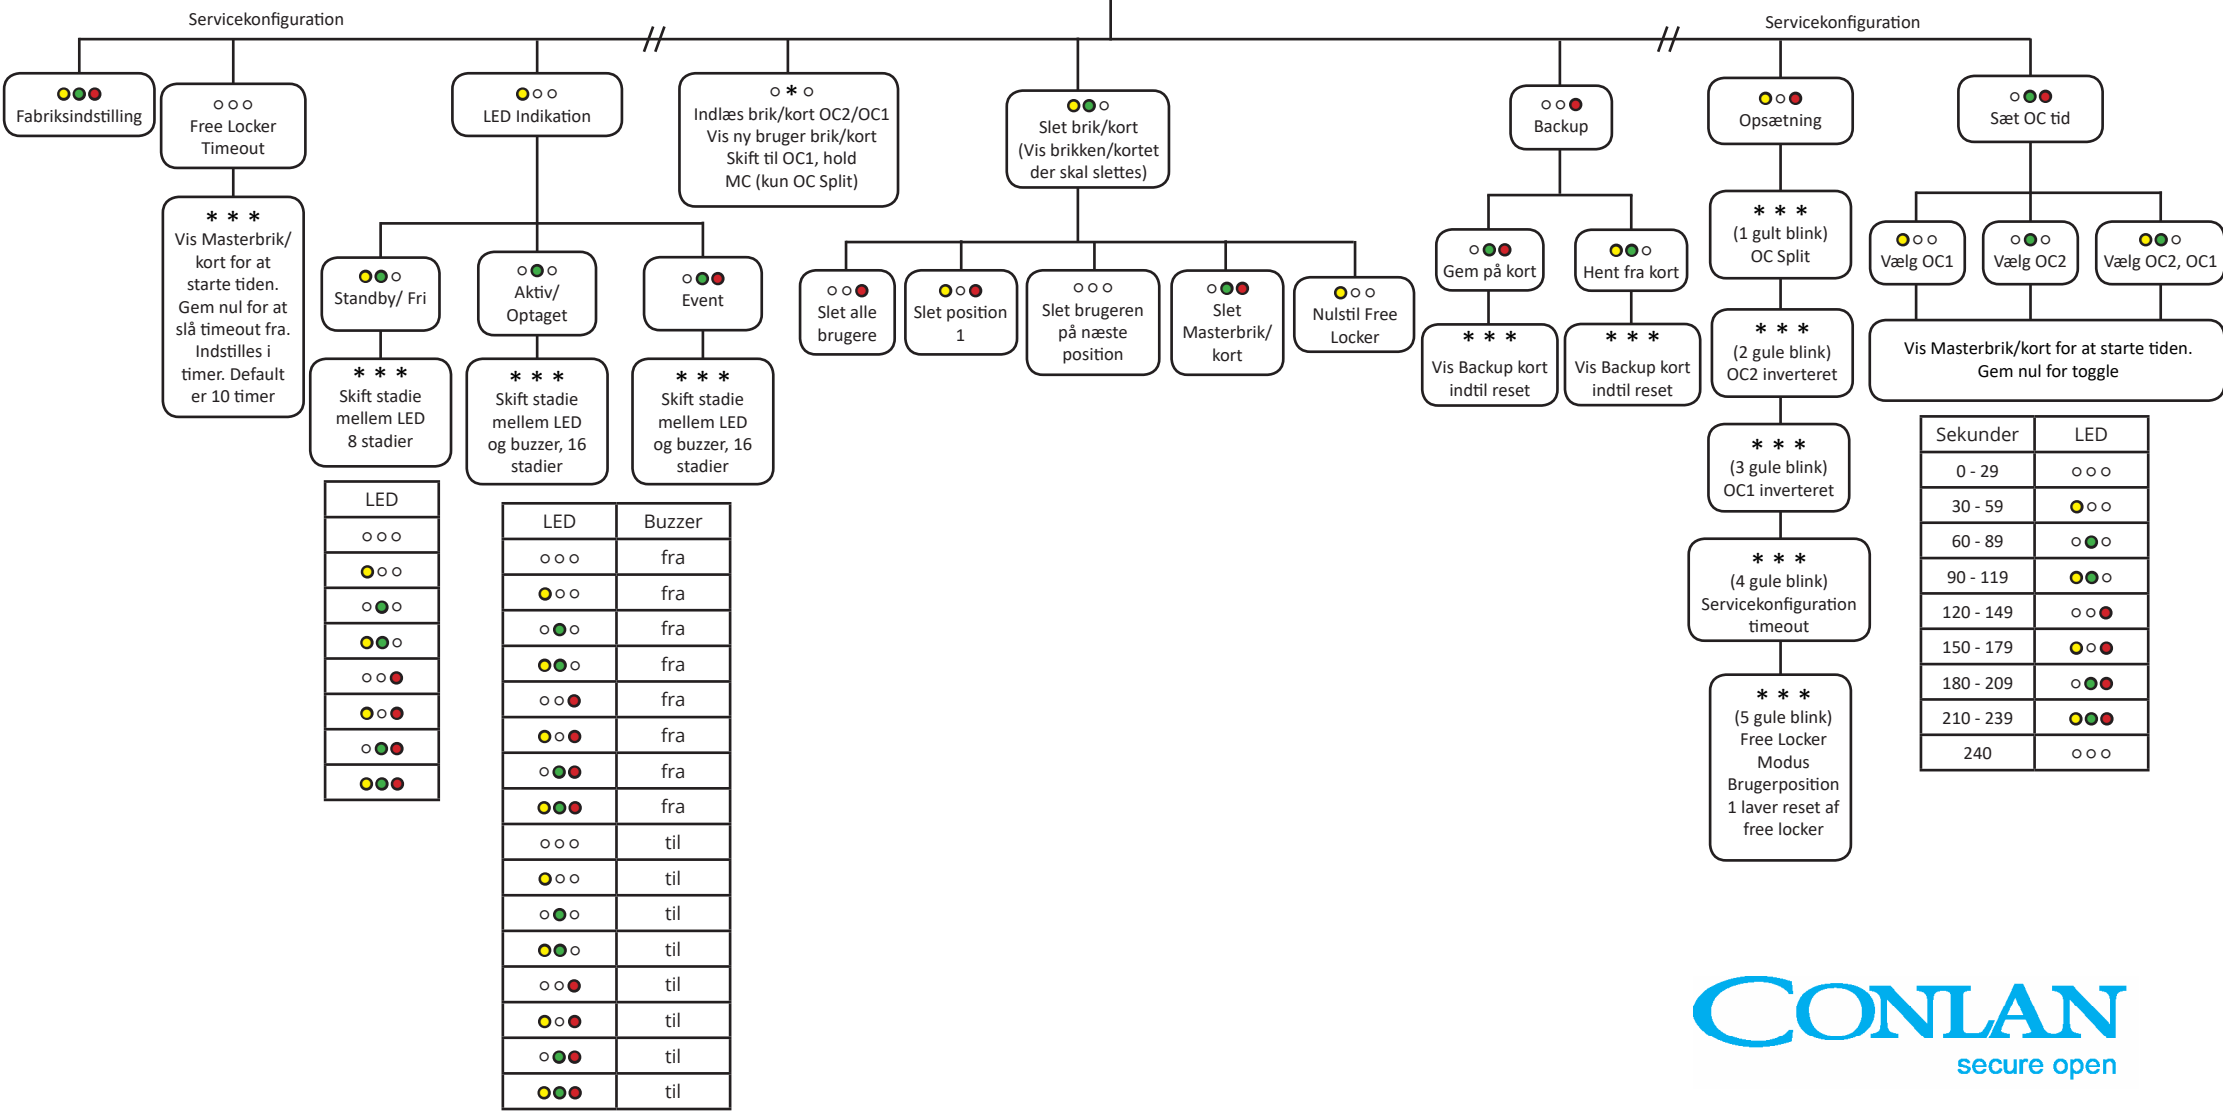

Sekunder	LED
0 - 29	○○○
30 - 59	●○○
60 - 89	○●○
90 - 119	●●○
120 - 149	○○●
150 - 179	●○●
180 - 209	○●●
210 - 239	●●●
240	○○○